
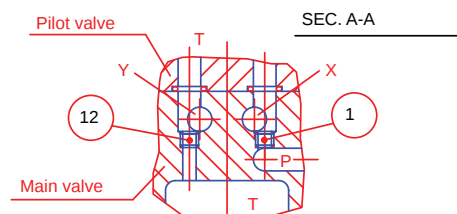
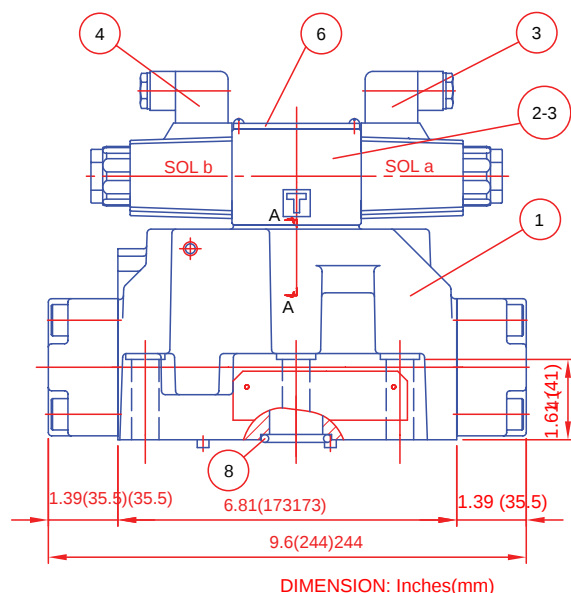



IFP DG08 SOLENOID CONTROLLED PILOT OPERATED DIRECTIONAL VALVE SIZE NG22 /CETOP08

DIMENSIONS:

■ DG08-E-*C-AC* 72DN

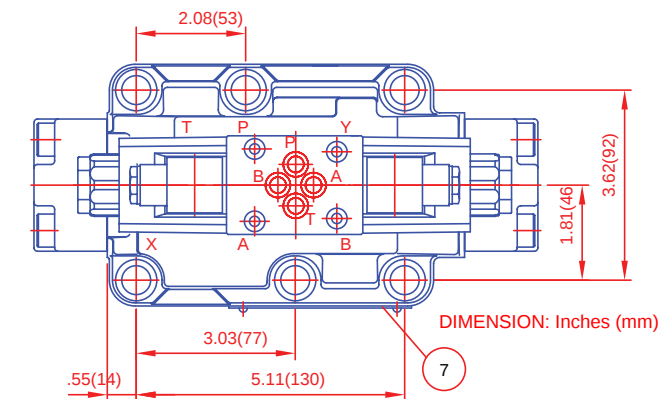

Pilot oil feed(plug: M6x8L)
external: 11 plugged
internal: 11 open
Pilot oil drain(plug: M
external: 12 plugged
internal: 12 open

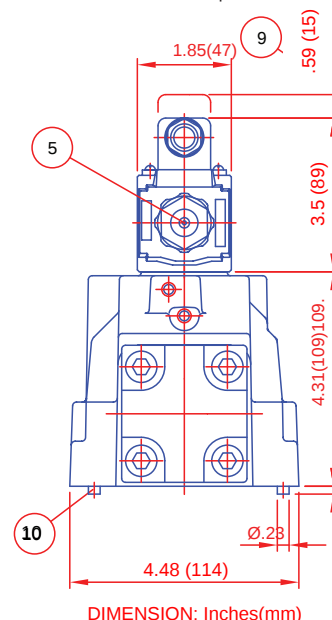

1: Main valve

2: Pilot valve

2-1: Pilot valve DG03-2A-* (1 solenoid) for main valves with spools *A, *B (3 position valve with solenoid on side a)

2-2: Pilot valve DG03-2AL-* (1 solenoid) for main valves with spools *AL, *BL (3 position valve with solenoid on side b)

2-3: Pilot valve DG03-6C-* (2 solenoid) for main valves with 3 positions

3: Solenoid a, color of plug: grey

4: Solenoid b, color of plug: black

5: Push pin for manual operation

6: Nameplate for pilot valve

7: Nameplate for whole valve

8: O-ring:

Ports A,B,P,T: AS568-215 (NBR,Hs90);


Ports X,Y: AS568-210 (NBR,Hs90)

9: Space required to remove plug

10: Locating pin

STROKE ADJUSTMENT:

■ DG07-E-*-*-*70-S



P CHECK

■ DG08-E-*-*-*70-P

- 1.Seat
- 2.Poppet
- 3.Spring Retainer
- 4.Spring
- 5.O-Ring
- 6.O-Ring
- 7.C-retaining ring

