
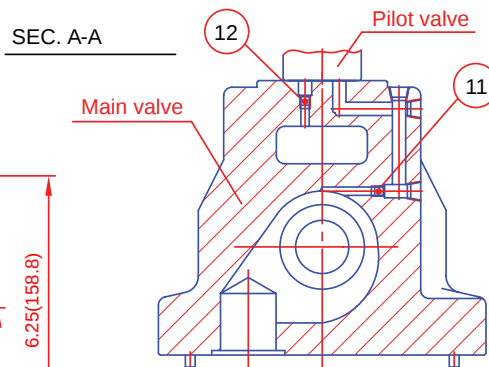


IFP DG10 SOLENOID CONTROLLED PILOT OPERATED DIRECTIONAL VALVE SIZE NG32 / CETOP10



DIMENSIONS:

■ DG10-E-*C-A*-DN-70

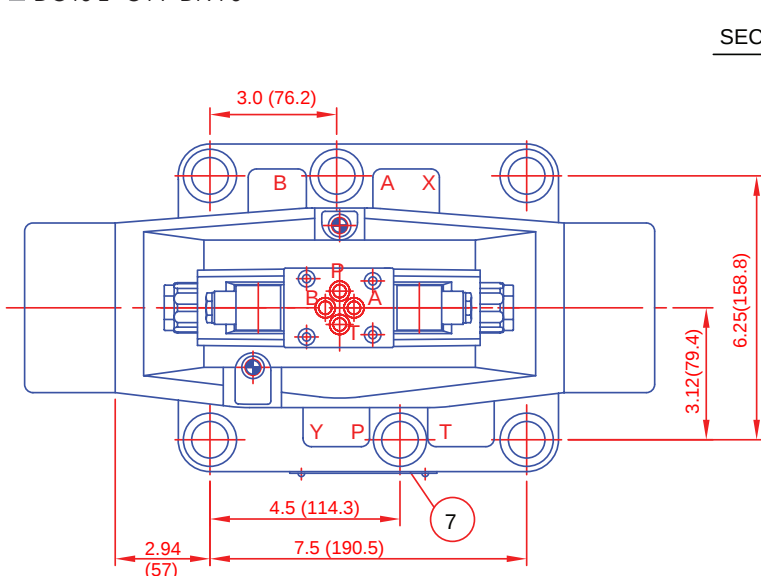

Pilot oil feed(plug: M6x8L)
external:11 plugged
internal:11 open

Pilot oil drain(plug: M6x8L)
external:12plugged
internal:12open

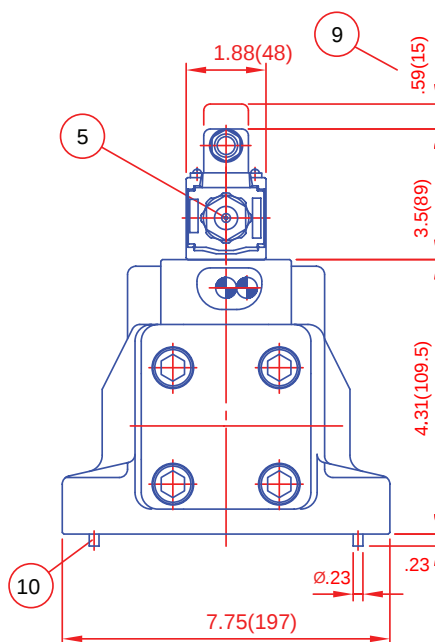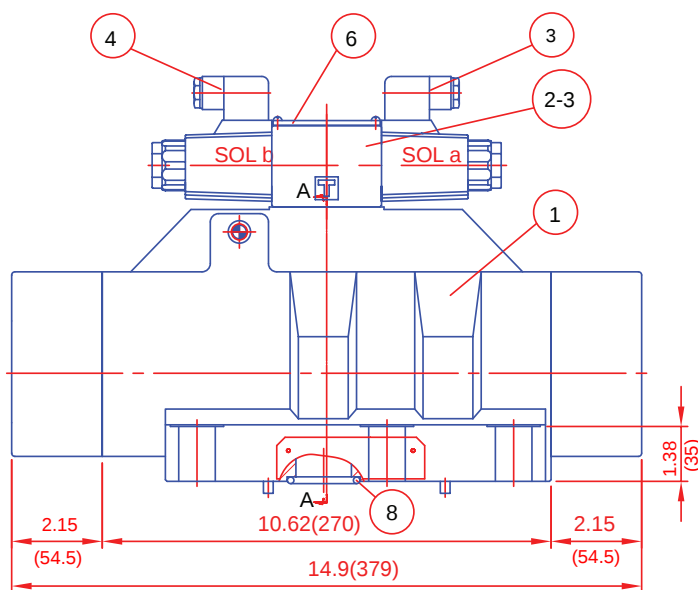

- | | |
|--|---|
| 1: Main valve | 4: Solenoid b, color of plug: black |
| 2: Pilot valve | 5: Push pin for manual operation |
| 2-1: Pilot valve DG03-2A-* (1 solenoid) for main valves with spools *A, *B (3 position valve with solenoid on side a) | 6: Nameplate for pilot valve |
| 2-2: Pilot valve DG03-2AL-* (1 solenoid) for main valves with spools *AL, *BL (3 position valve with solenoid on side b) | 7: Nameplate for whole valve |
| 2-3: Pilot valve DG03-6C-* (2 solenoid) for main valves with 3 positions | 8: O-ring:
Ports A,B,P,T: 1B-P38 (NBR,Hs90);
Ports X,Y: 1B-P24 (NBR,Hs90) |
| 3: Solenoid a, color of plug: grey | 9: Space required to remove plug |
| | 10: Locating pin |