

IFP DG03 SOLENOID OPERATED DIRECTIONAL CONTROL VALVE SIZE NG-6/CETOP-03


PERFORMANCE FIGURES & CURVES:
Pressure Drop Curve Reference Chart

Viscosity of Hydraulic Fluid: 20 mm²/s

Spool Type	C,B,BL				
	Control Position				
	P→A	B→T	P→B	A→T	P→T
0	4	1	4	1	5
1	6	8	6	8	7
2	4	2	4	2	-
3	5	2	5	2	-
6	5	2	5	2	-
7	4	3	4	3	-
8	6	8	6	8	7
11	6	8	6	8	7
31	5	8	5	2	-
33	5	2	5	2	-

Spool Type	A,AL			
	Control Position			
	P→A	B→T	P→B	A→T
0	4	2	4	2
2	4	6	4	6
6	5	2	5	2
7	4	3	4	3
22	4	-	4	-

Spool Type	N			
	Control Position			
	P→A	B→T	P→B	A→T
2	3	4	3	4

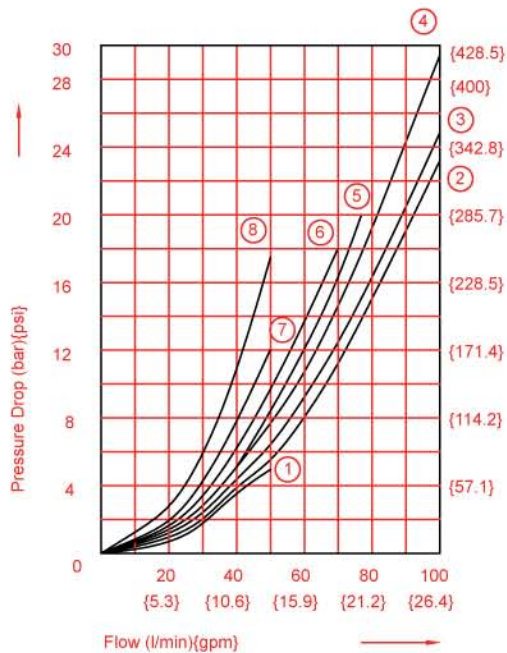

WIRING:

<p>■ DG03-*C-*-72-WB</p>	<p>Note:</p> <ol style="list-style-type: none"> 1. Com terminal is fitted in double solenoid valve for easiness of wiring. 2. use a ground terminal when ground wiring is necessary. 3. use a compressed terminal for m3. 4. Fasten the screw of the terminal with 4.3 - 6.1 lbs torqu 	<p>■ DG03-*-72-DN</p>
--------------------------	--	-----------------------