


IFP DG08 SOLENOID CONTROLLED PILOT OPERATED DIRECTIONAL VALVE SIZE NG22/CETOP08

SUBPLATE DIMENSIONS:

Bottom Connection

■ DGSP-08*-*

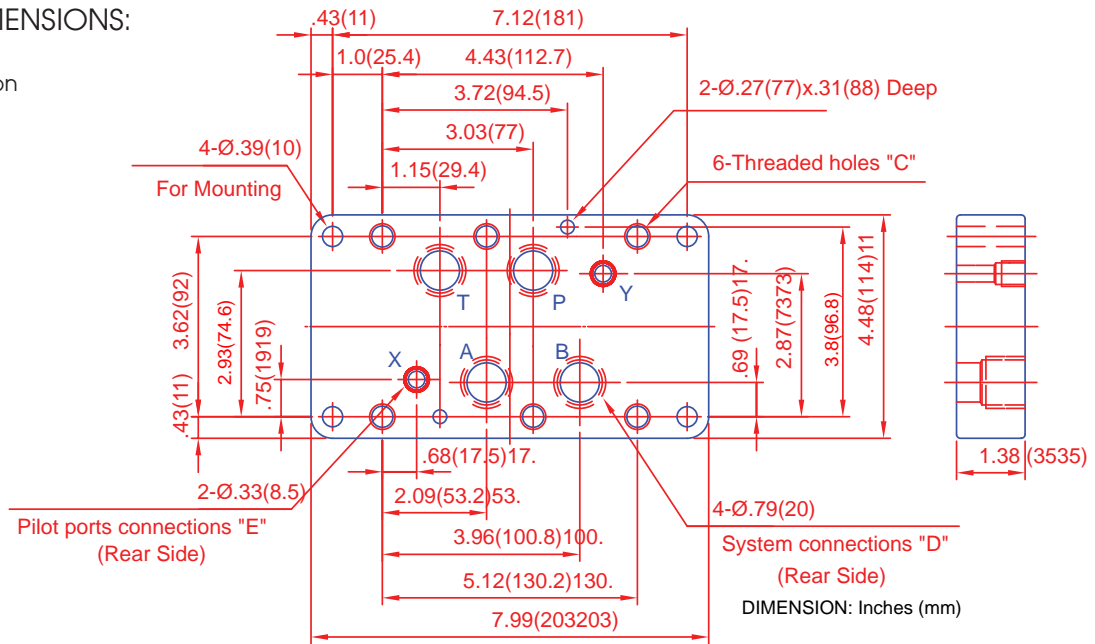


| Model | C | D | E | Weight |
|-------------|--|---------|---------|--------------------|
| DGSP-08-12 | M12x25 Deep(min) full thread depth | 3/4"Rc | 1/4"Rc | 10.5Lbs (4.8Kg) |
| DGSP-08-16 | | 1"Rc | 1/4"Rc | |
| DGSP-08G-12 | | 3/4"BSP | 1/4"BSP | 10.5Lbs (4.8Kg) |
| DGSP-08G-16 | | 1"BSP | 1/4"BSP | |

| Model | C | D | E | Weight |
|-------------|--|---------|---------|--------------------|
| DGSP-08N-12 | 1/2"-13UNC-2B Thd.x1" Deep full thread depth | 3/4"NPT | 1/4"NPT | 10.5Lbs (4.8Kg) |
| DGSP-08N-16 | | 1"NPT | 1/4"NPT | |
| DGSP-08S-12 | | 3/4"SAE | 1/4"SAE | 10.5Lbs (4.8Kg) |
| DGSP-08S-16 | | 1"SAE | 1/4"SAE | |

Side Connection

■ DGSP-08*-*E

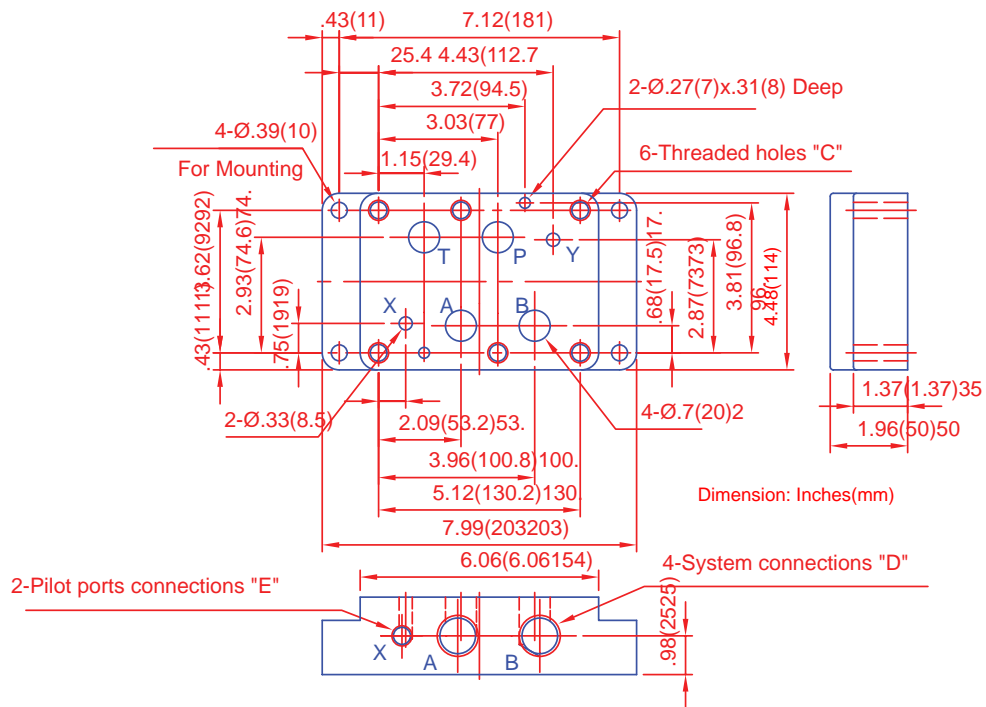

| Model | C | D | E | Weight |
|--------------|---|---------|---------|--------------------|
| DGSP-08-12E | M12x25 Deep(min) full thread depth | 3/4"Rc | 1/4"Rc | 10.5Lbs (6.4Kg) |
| DGSP-08-16E | | 1"Rc | 1/4"Rc | |
| DGSP-08G-12E | | 3/4"BSP | 1/4"BSP | 10.5Lbs (6.4Kg) |
| DGSP-08G-16E | | 1"BSP | 1/4"BSP | |

| Model | C | D | E | Weight |
|--------------|--|---------|----------|--------------------|
| DGSP-08N-12E | 1/2"-13UNC-2B Thd/*1" Deep full thread depth | 3/4"NPT | 1/4" NPT | 10.5Lbs (6.4Kg) |
| DGSP-08N-16E | | 1" NPT | 1/4" NPT | |
| DGSP-08S-12E | | 3/4"SAE | 1/4"SAE | 10.5Lbs (6.4Kg) |
| DGSP-08S-16E | | 1"SAE | 1/4"SAE | |