


IFP ALUMINUM HIGH PERFORMANCE GEAR PUMPS




FEATURES

- EXTRUDED ALUMINUM DIE CAST BODY
- ALUMINUM MOUNTING FLANGE / COVER
- FLOATING AXLE SLEEVE AND DU BEARINGS
- DOUBLE LIP SHAFT SEAL TO PREVENT CAVITATION AND LEAKAGE
- PRESSURES TO 3600 PSI
- SPEED 600 TO 3000 RPM
- HIGH TEMPERATURE SEALS AND GASKETS
- ALL UNITS 100% FACTORY TESTED

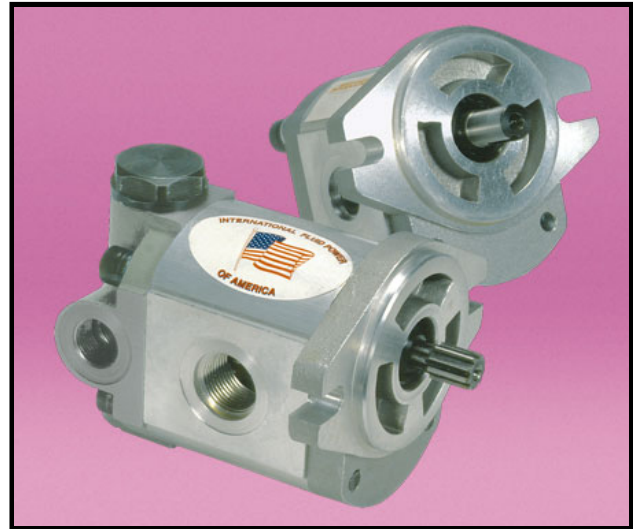

OPTIONS

- * MOUNTING - S.A.E. EUROPEAN, DIN
- * PORTS AVAILABLE - S.A.E. NPT, BSP, METRIC
- * ONE PIECE SHAFT & GEAR ASSEMBLY
- * INTEGRAL RELIEF / PRIORITY CONTROL
- * SINGLE / TANDEM UNITS
- * VITON SEALS
- * SIDE OR REAR PORTS

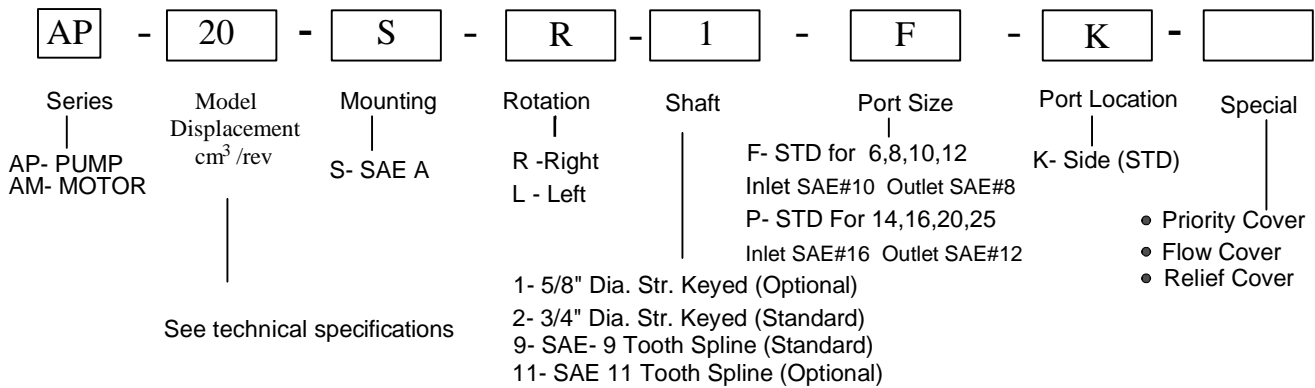

Technical Specifications

IFP Code	Model	Theoretical Displacement		Pump Flow GPM @ 1800 RPM/3000 PSI	Minimum RPM	Maximum RPM	Max. Continuous Pressure (PSI)	Approx. Weight lbs (kg)
		in ³ /rev.	cm ³ /rev.					
AP:Pump	6	0.38	6	2.78	600	3000	3600	4.4 (2.0)
	8	0.52	8	3.81		3000	3600	4.6 (2.1)
10	0.62	10	4.38	3000		3600	4.8 (2.2)	
AM: Motor	12	0.76	12	5.39		3000	3600	5.0 (2.3)
	14	0.85	14	6.32		3000	3600	5.3 (2.4)
	16	0.98	16	7.21		3000	3000	5.5 (2.5)
	20	1.22	20	9.18		3000	3000	5.7 (2.6)
	25	1.53	25	11.20		3000	3000	5.9 (2.7)